
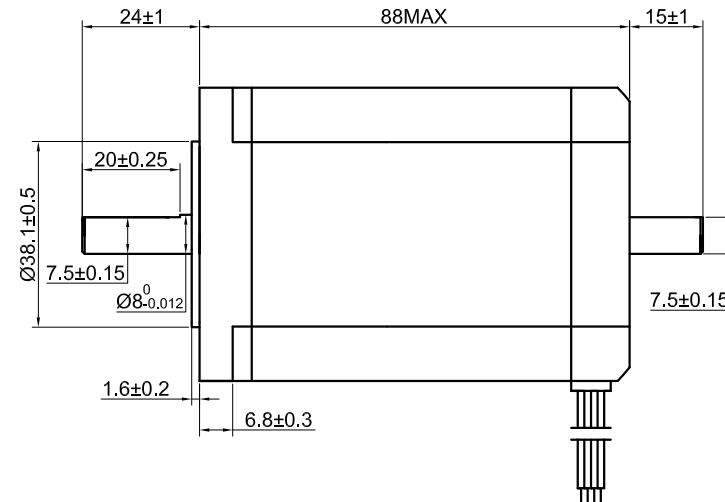
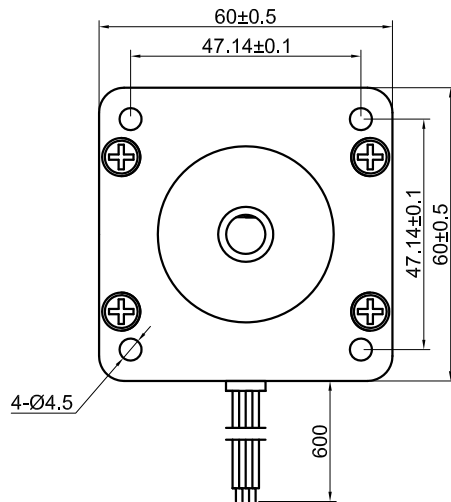





SPECIFICATION		CONNECTION	BIPOLAR				
VOTAGE(VOC)			3.85				
AMPS/PHASE			3.50				
RESISTANCE/PHASE(Ohms)@25°C			1.10±10%				
INDUCTANCE/PHASE(mH)@1KHz			5.60±20%				
HOLDING TORQUE(Nm)[lb-in]			3.10[27.44]				
STEP ANGLE(°)			1.80				
STEP ACCURACY(NON-ACCUM)			±5.00%				
ROTOR INERTIA(g-cm²)			840.00				
WEIGHT(Kg)[lb]			1.34[2.95]				
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)							
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]							
INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)							
INSULATION CLASS B 130°C[266°F]							
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)							
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)							
 www.oyostepper.com				APVD			STEPPER MOTOR
				CHKD			
			1:1.5	DRN			
			SCALE	SIGNATURE		DATE	

TYPE OF CONNECTION (EXTERN)		MOTOR	
PIN NO	BIPOLAR	LEADS	WINDING
1	A —	BLK	
2	A\ —	GRN	
3	B —	RED	
4	B\ —	BLU	

FULL STEP 2 PHASE-Ex. ,
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\		CCW ↑ CW
1	+	+	-	-		
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		

