


SPECIFICATION	VALUE
NUMBER OF PHASE	3.00
AMPS/PHASE	5.00
RESISTANCE/PHASE(Ohms)@20°C	1.67±10%
INDUCTANCE/PHASE(mH)@1KHz	28.00±20%
HOLDING TORQUE(Nm)[lb-in]	30.00[265.72]
STEP ANGLE(°)	1.20
STEP ACCURACY(NON-ACCUM)	±5.00%
ROTOR INERTIA(g-cm <sup>2</sup> )	28900.00
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)	
AMBIENT TEMPERATURE -20°C~50°C[-4°F~122°F]	
INSULATION CLASS B 130°C[266°F]	
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	

TYPE OF CONNECTION (EXTERN)		MOTOR
PIN NO	BIPOLAR	LEADS
1	U	RED
2	V	YEL
3	W	GRN
4	GND	BLK

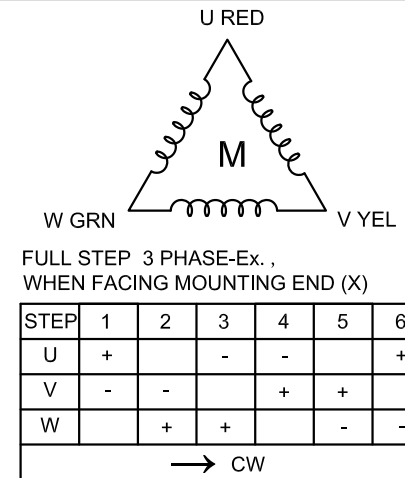

	APVD		4.18.2019
	CHKD		
1:2.5	DRN		
SCALE	SIGNATURE		DATE

STEPPER MOTOR

52HT79-5003S