

OUKEDA MOTOR	The output shaft size can be customized

Dimensional Drawing

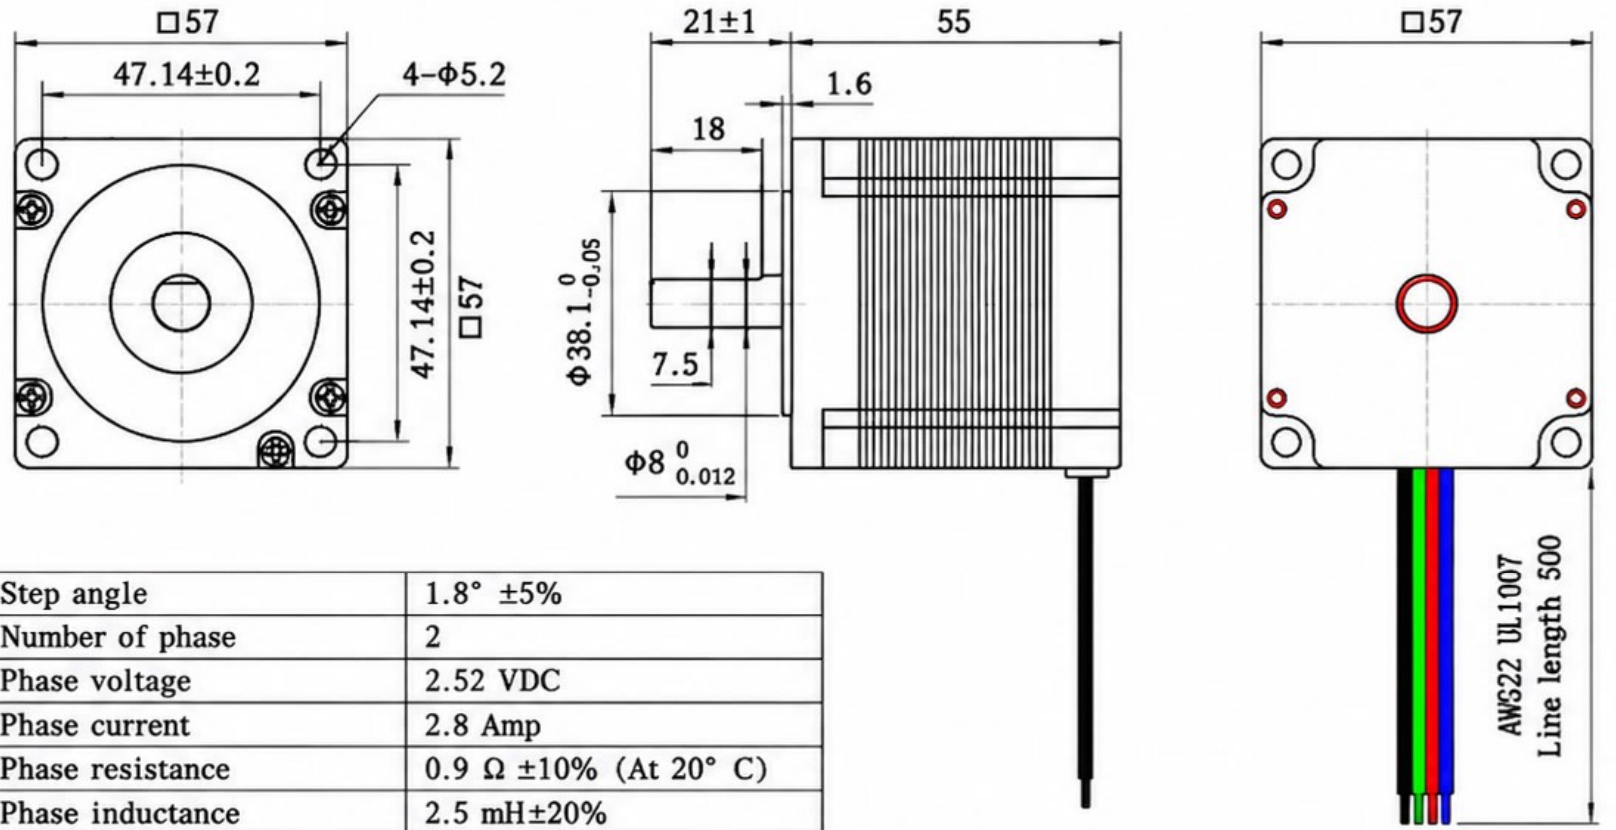

Wiring Diagram



1. Step angle	1.8° ±5%
2. Number of phase	2
3. Phase voltage	2.52 VDC
4. Phase current	2.8 Amp
5. Phase resistance	0.9 Ω ±10% (At 20° C)
6. Phase inductance	2.5 mH±20%
7. Static moment	1.26 N.m
8. Insulation class	Class B
9. Insulation resistance	100MΩ min. (500V DC)
10.Ambient temperature	-40° ~ +50°
11.Ambient hum	15% to 95%
12.Motor weight	Approx. 0.6 kg
13.Use voltage	VDC:20~48V VAC24~36V
14.Recommended drive	OK2D656T

Excitation sequence and direction of clockwise

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CW ↓ ↑ CCW

seen from the mounting surface It is sclockwise

Technology		Unit	mm	OUKEDA®	DRAWING	57BYG250B
Design						
Check				OYSTEPPER		
Approved	HE ZHEN	Scale	1: 1			