



OUKEDA MOTOR

The output shaft size can be customized

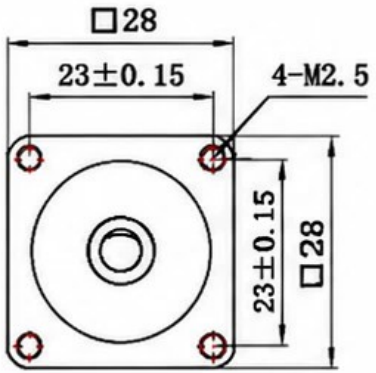

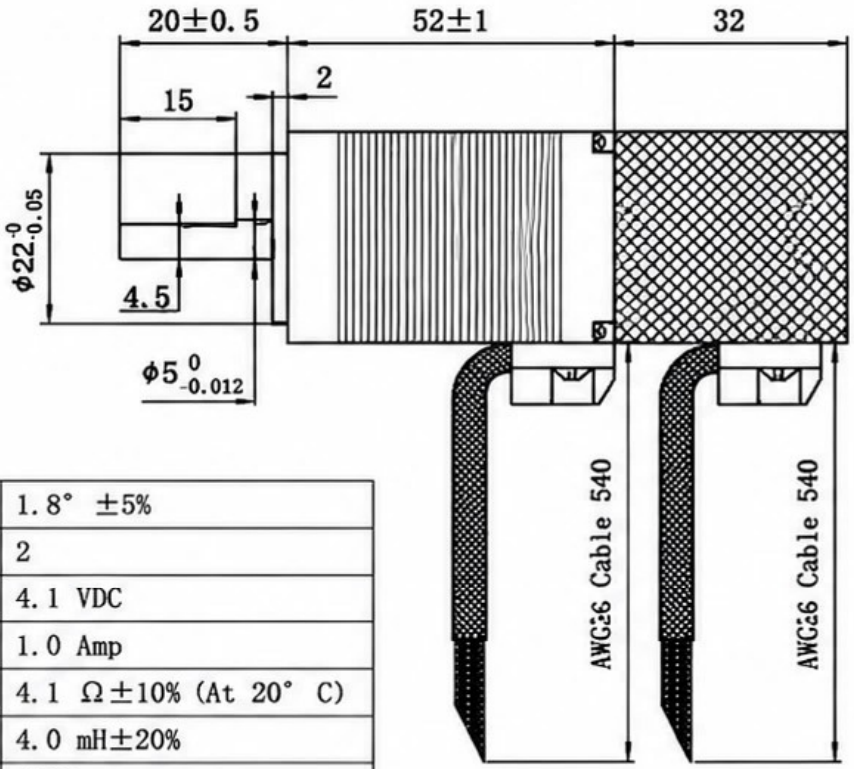

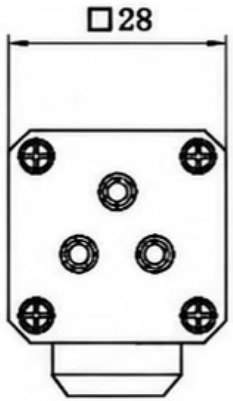

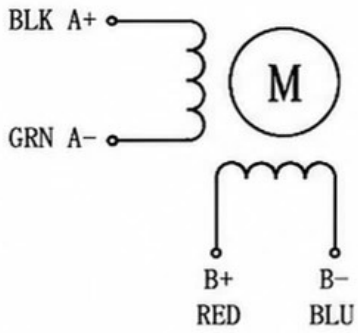

1. Step angle	1.8° ±5%
2. Number of phase	2
3. Phase voltage	4.1 VDC
4. Phase current	1.0 Amp
5. Phase resistance	4.1 Ω±10% (At 20° C)
6. Phase inductance	4.0 mH±20%
7. Holding torque	1200 g.cm
8. Insulation class	Class B
9. Insulation resistance	100MΩ min. (500V DC)
10. Ambient temperature	-20° ~+50° C
11. Ambient humidity	15% to 95%
12. Motor weight	Approx 0.2 kg
13. Use voltage	VDC:12-24
14. Recommended drive	OK2D4020A

Power off brake	
Voltage	24 VDC
Current	0.07 Amp
Moment	0.2 N.m
Power	2.0W
Definition	RED+ BLK-
Response time	50MS

Excitation sequence and direction of clockwise

CW

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CCW

seen from the mounting surface It is clockwise

Technology		Unit	mm	OUKEDA®	Drawing	OK28DL51-104A-YS
Design						
Check						
Approved	HE ZHEN	Scale	1: 1			

OY STEPPER