

OUKEDA MOTOR	The output shaft size can be customized	OYSTEPPER

Dimensional drawing

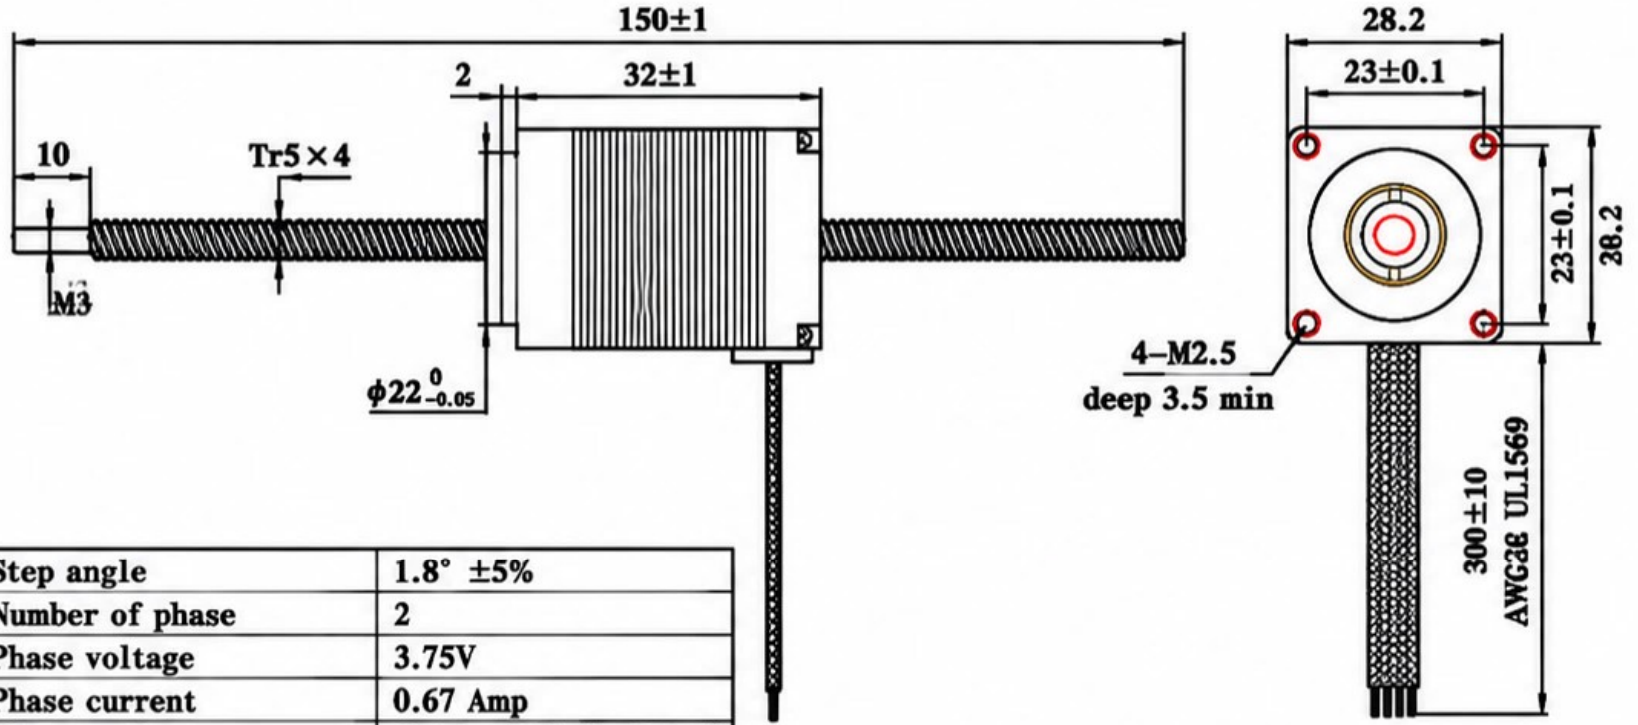

Wiring Diagram

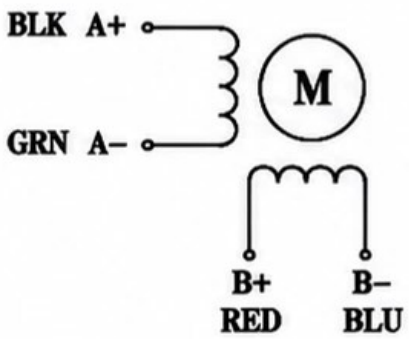

1. Step angle	1.8° ±5%
2. Number of phase	2
3. Phase voltage	3.75V
4. Phase current	0.67 Amp
5. Phase resistance	5.6 Ω ±10% (At 20° C)
6. Phase inductance	3.9 mH±20%
7. Static moment	490 g.cm
8. Insulation class	Class B
9. Insultation resistance	100MΩ min. (500V DC)
10. Ambient temperature	–20° ~+50°
11. Ambient hum	15% to 95%
12. Motor weight	Approx 0.18 Kg
13. Use voltage	VDC:12–24V
14. Recommended drive	OK2D4020A

Excitation sequence and direction of clockwise

STEP	A+	B+	A–	B–
1	+	+	–	–
2	–	+	+	–
3	–	–	+	+
4	+	–	–	+

CW ↓ ↑ CCW

seen from the mounting surface It is clockwise

Technology		Unit	mm	OUKEDA®	DRAWING	OK28STH32E–150G4–M3
Design						