

OUKEDA MOTOR OK28ZK34-084B-HM5

REV	A

General Specification		Electrical Specification	
Step Angle	1.8° ±5%	Rated Voltage	3.6 V
Number of Phase	2	Rated Current	0.8 A
Insulation Resistance	100MΩ min. (500V DC)	Phase Resistance	4.5 Ω ±10%
Insulation Class	Class B	Phase Inductance	2.7 mH ±20%
Rotor Inertia	9 g·cm^2	Holding Torque	67 mN·m
Weight	0.12 kg	Detent Torque	5 mN·m

Wiring Diagram

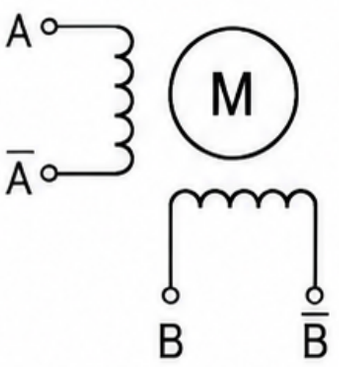

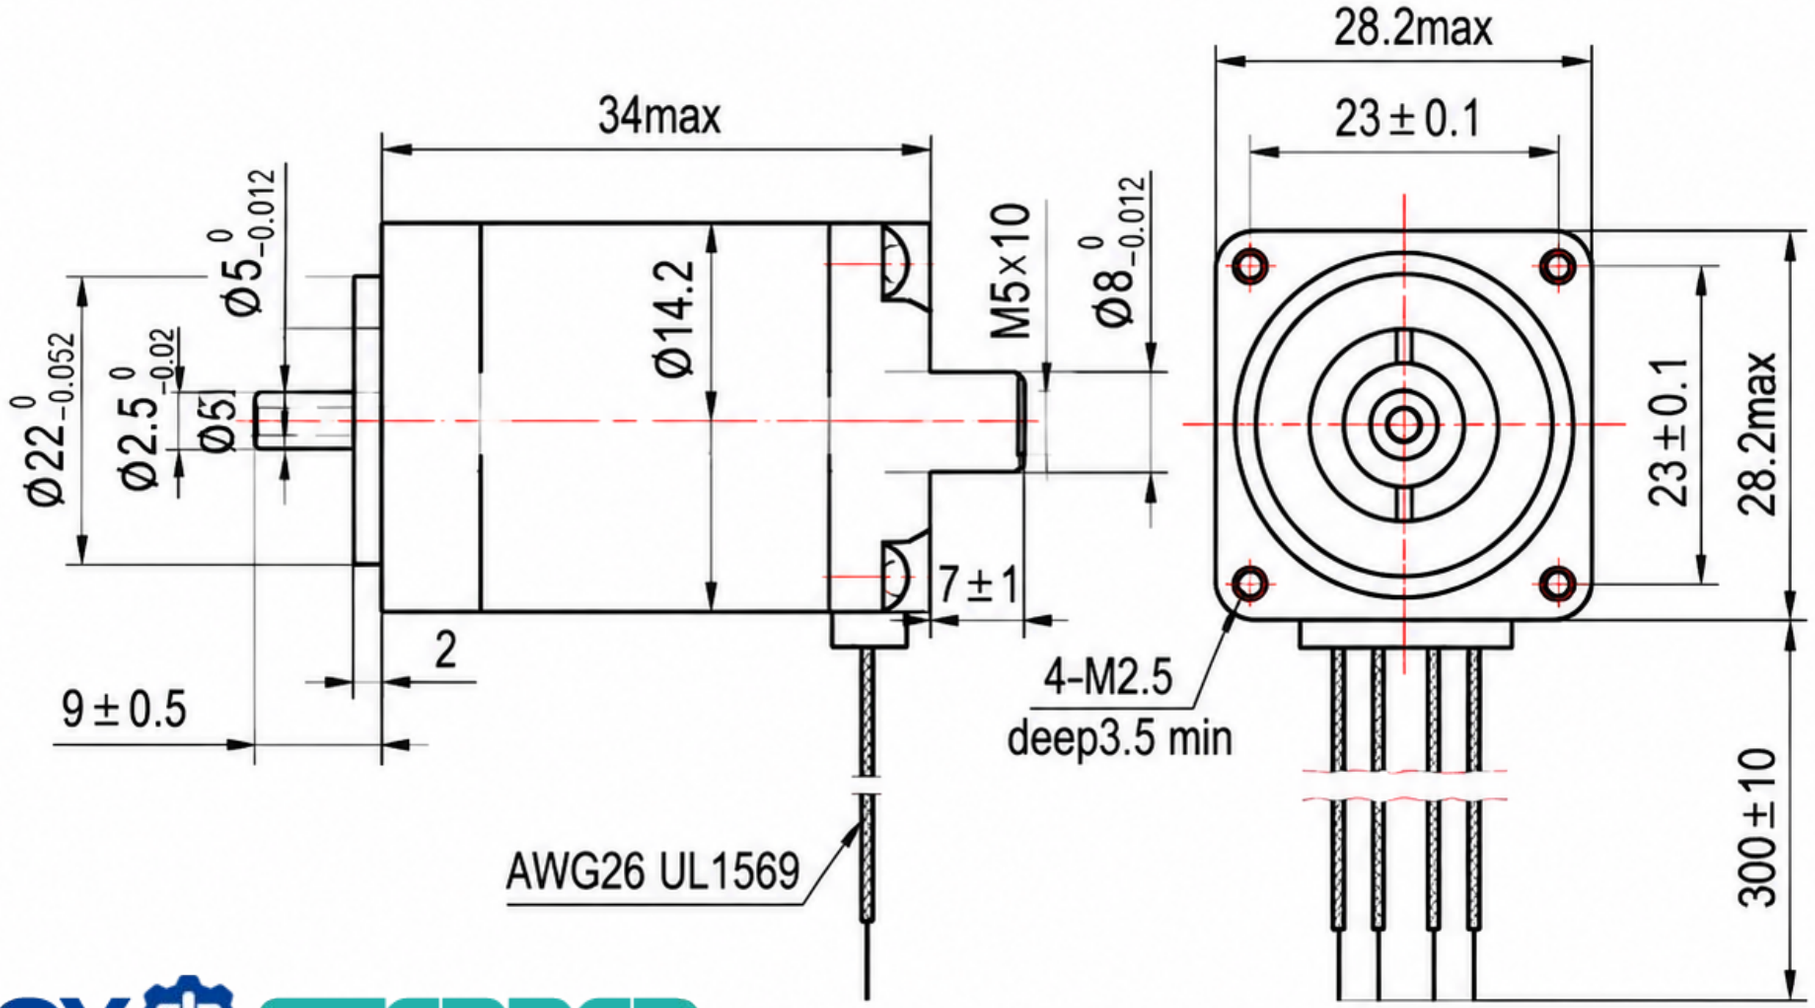

OY STEPPER