



Dimensional Drawing

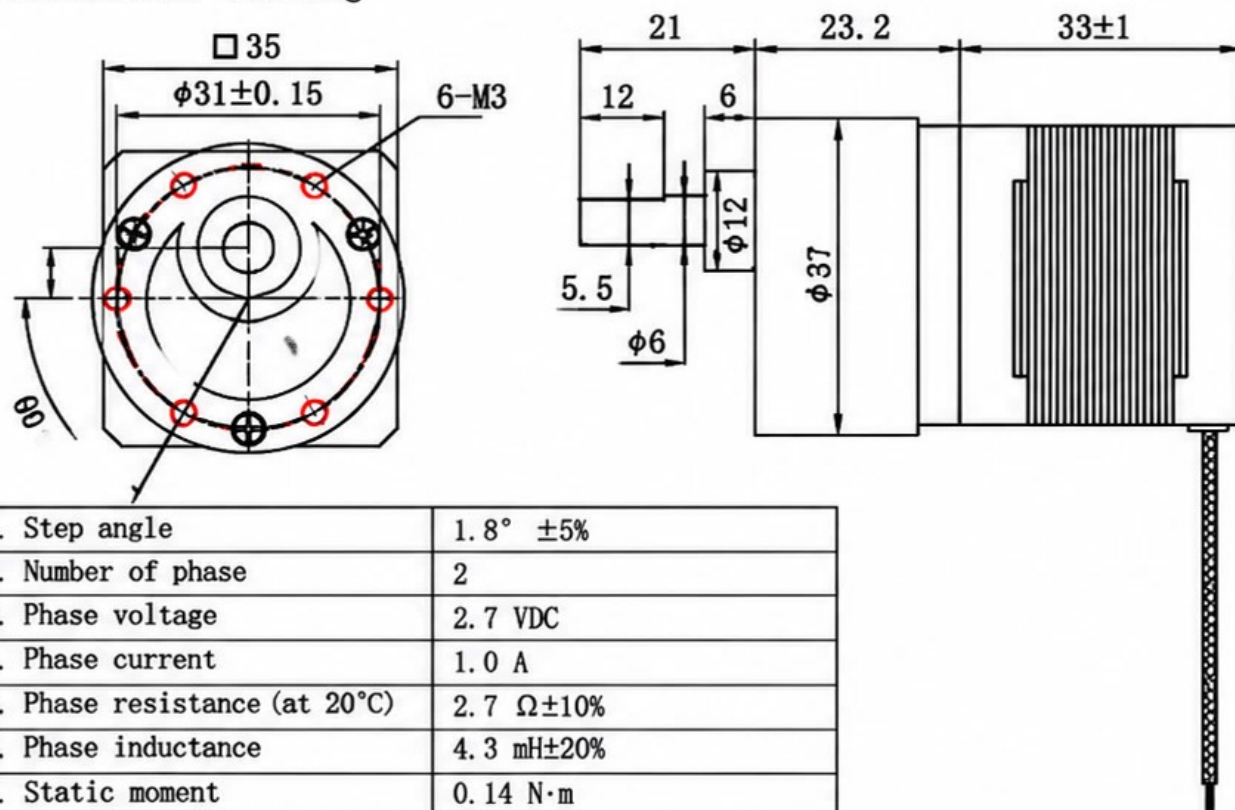

1. Step angle	1.8° ±5%
2. Number of phase	2
3. Phase voltage	2.7 VDC
4. Phase current	1.0 A
5. Phase resistance (at 20°C)	2.7 Ω ±10%
6. Phase inductance	4.3 mH ±20%
7. Static moment	0.14 N·m
8. Insulation class	Class B
9. Insulation resistance	100M Ω min. (500V DC)
10. Ambient temperature	-20° ~+50°
11. Ambient humidity	15% to 95%
12. Motor weight	Approx. 0.2 kg
13. Use voltage	VDC: 12-24V
14. Recommended drive	OK2D4020A

Wiring Diagram

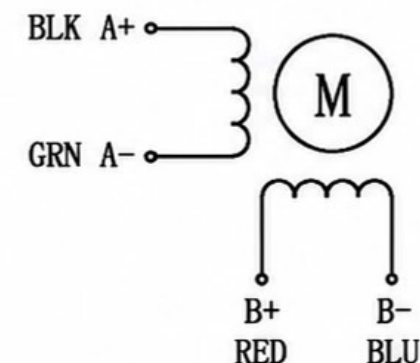

Excitation Sequence and Direction of Clockwise

STEP	A+	B+	A-	B-	
1	+	+	-	-	
2	-	+	-	+	
3	-	-	+	+	
4	+	-	+	-	

CW ↓ CCW ↑

Technology

Unit

mm

Design

Check

Approved

OUKEDA®

DRAWING

OK35FD34-10A-PX10G

Scale

1:1