

OUKEDA MOTOR

The output shaft size can be customized

Dimensional drawing

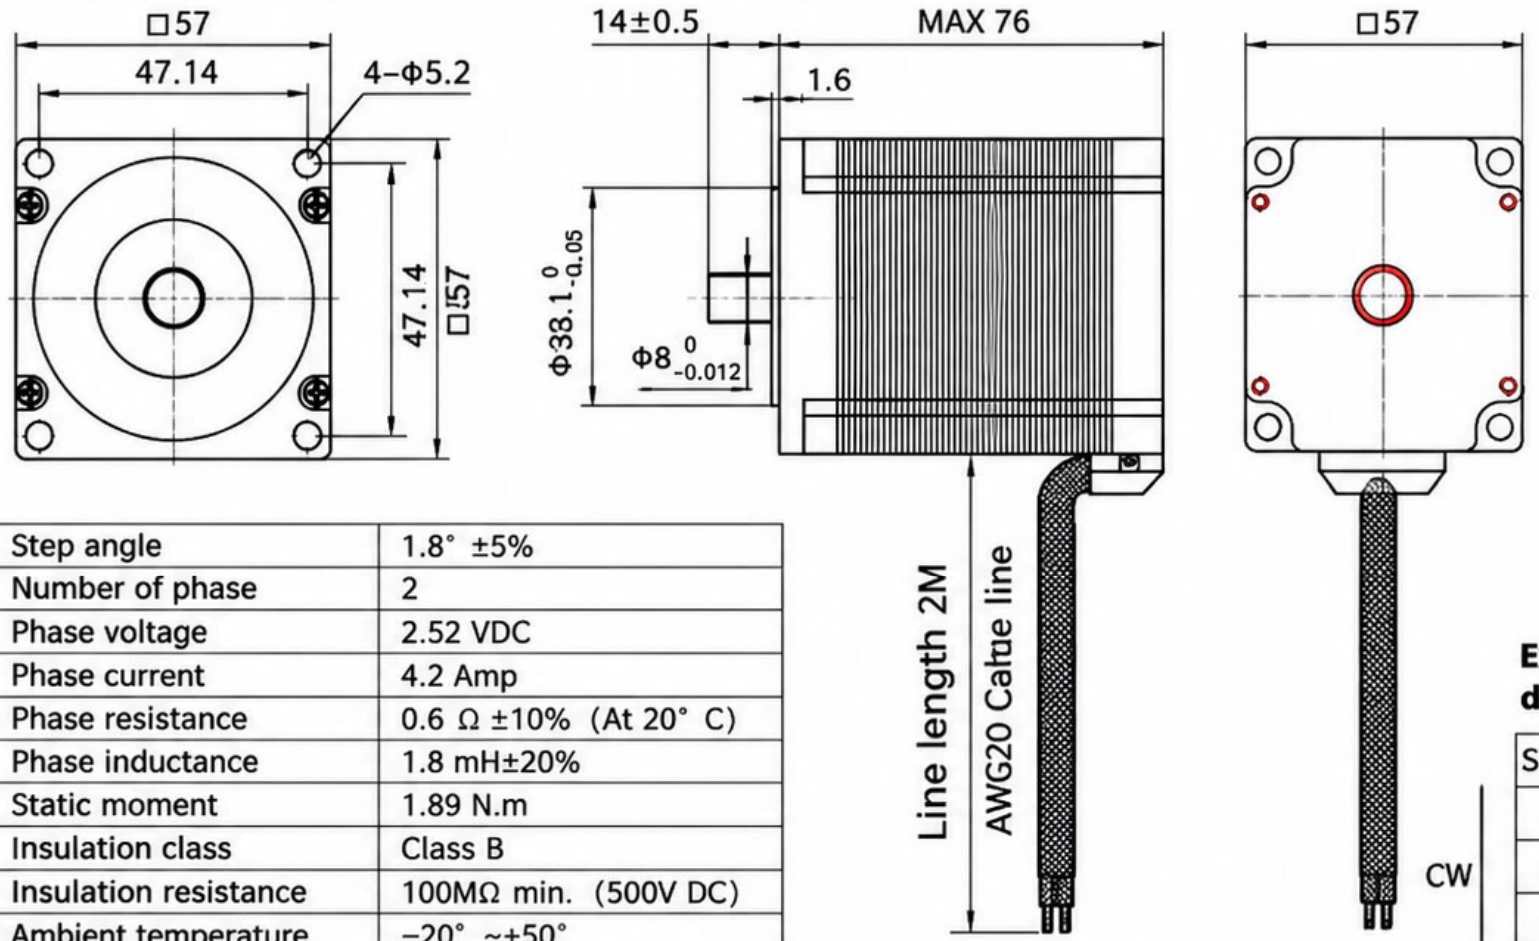

Wiring Diagram

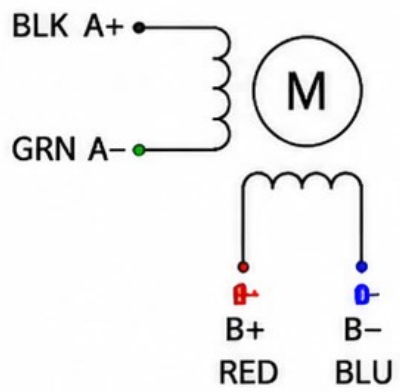

1.	Step angle	1.8° ±5%
2.	Number of phase	2
3.	Phase voltage	2.52 VDC
4.	Phase current	4.2 Amp
5.	Phase resistance	0.6 Ω ±10% (At 20° C)
6.	Phase inductance	1.8 mH±20%
7.	Static moment	1.89 N.m
8.	Insulation class	Class B
9.	Insulation resistance	100MΩ min. (500V DC)
10.	Ambient temperature	−20° ~+50°
11.	Ambient humidity	15% to 95%
12.	Motor weight	Approx. 1.1 Kg
13.	Use voltage	VDC:20−48V VAC:24−36V
14.	Recommended drive	OK2D656T

Excitation sequence and direction of clockwise

STEP	A+	B+	A−	B−
1	+	+	−	−
2	−	+	+	−
3	−	−	+	+
4	+	−	−	+

CW ↓ ↑ CCW

seen from the mounting surface It 1sclockwise

Technology		Unit	mm	OUKEDA®	DRAWING	OK57DL76-424A-14Y−2M
Design						
Check						
Approved	HE ZHEN	Scale	1: 1			

OYSTEPPER