


Dimensional Drawing

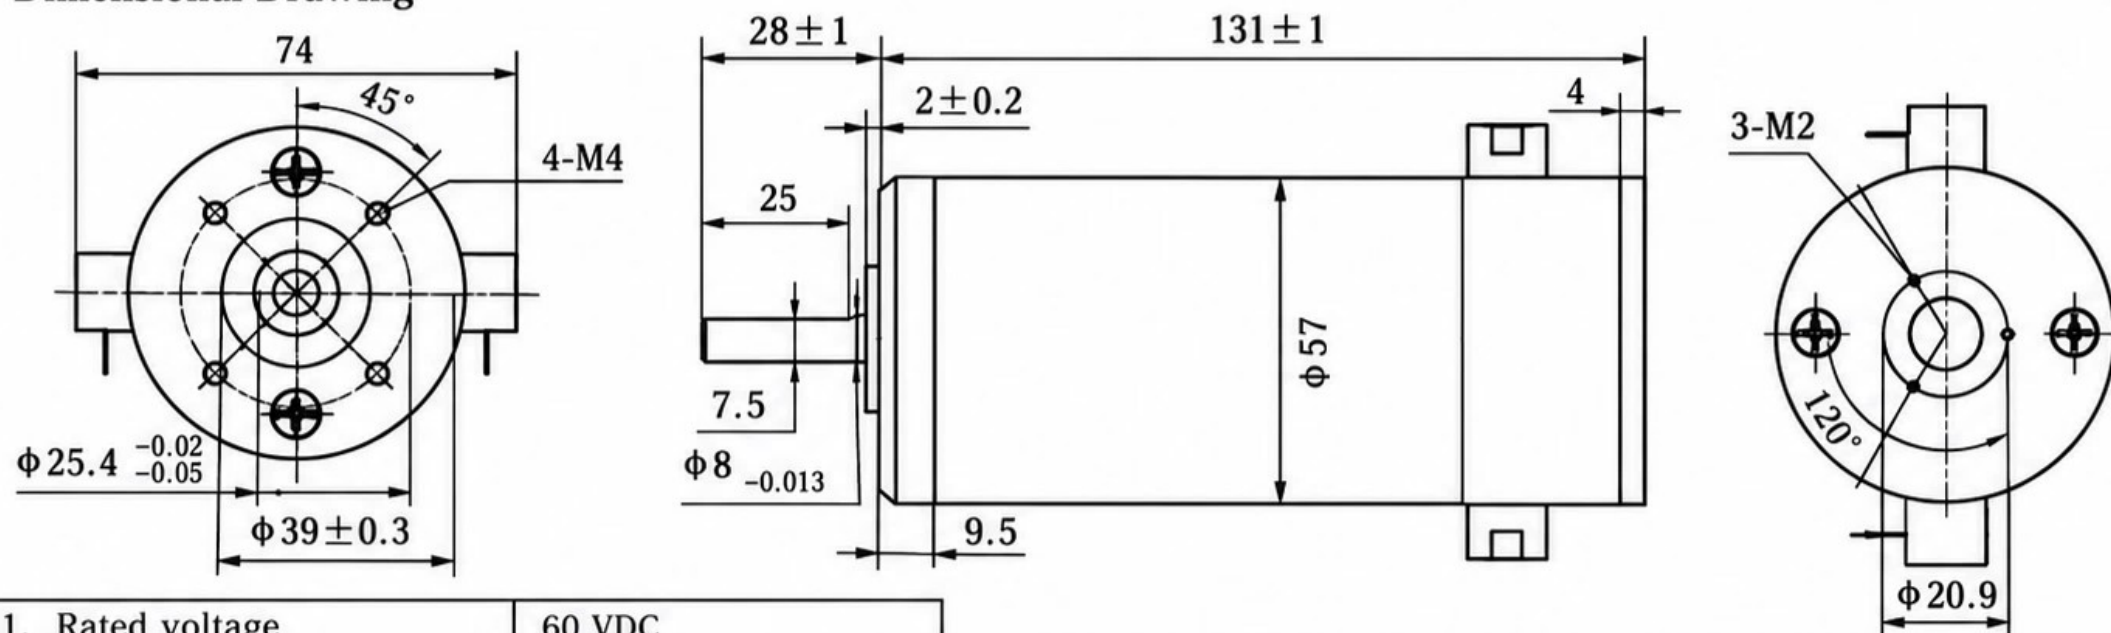

1. Rated voltage	60 VDC
2. No Load Speed	1900 RPM
3. Rated Speed	1500 RPM
4. No load Current (Max.)	0.15 A
5. Rated Current (Max.)	1.0 A
6. Rated Torque	0.25 N.m
7. Rated power	40 W
8. Torque constant	0.294 N.m/A
9. Resistance	14.3 Ω
10. Rotor inertia	0.16 kg.cm ²
11. Ambient hum	15% to 95%
12. Motor weight	Approx. 1.35 Kg
13. Insulation class	B

Technical Requirements:

1. Unspecified dimensional tolerances comply with GB1804-m;
2. The motor runs smoothly, without abnormal noise;
3. Rotation direction: clockwise.

Design

Unit

mm

Technology

OUKEDA[®]

Drawing

OK57ZLYS131-615A