


Dimensional Drawing

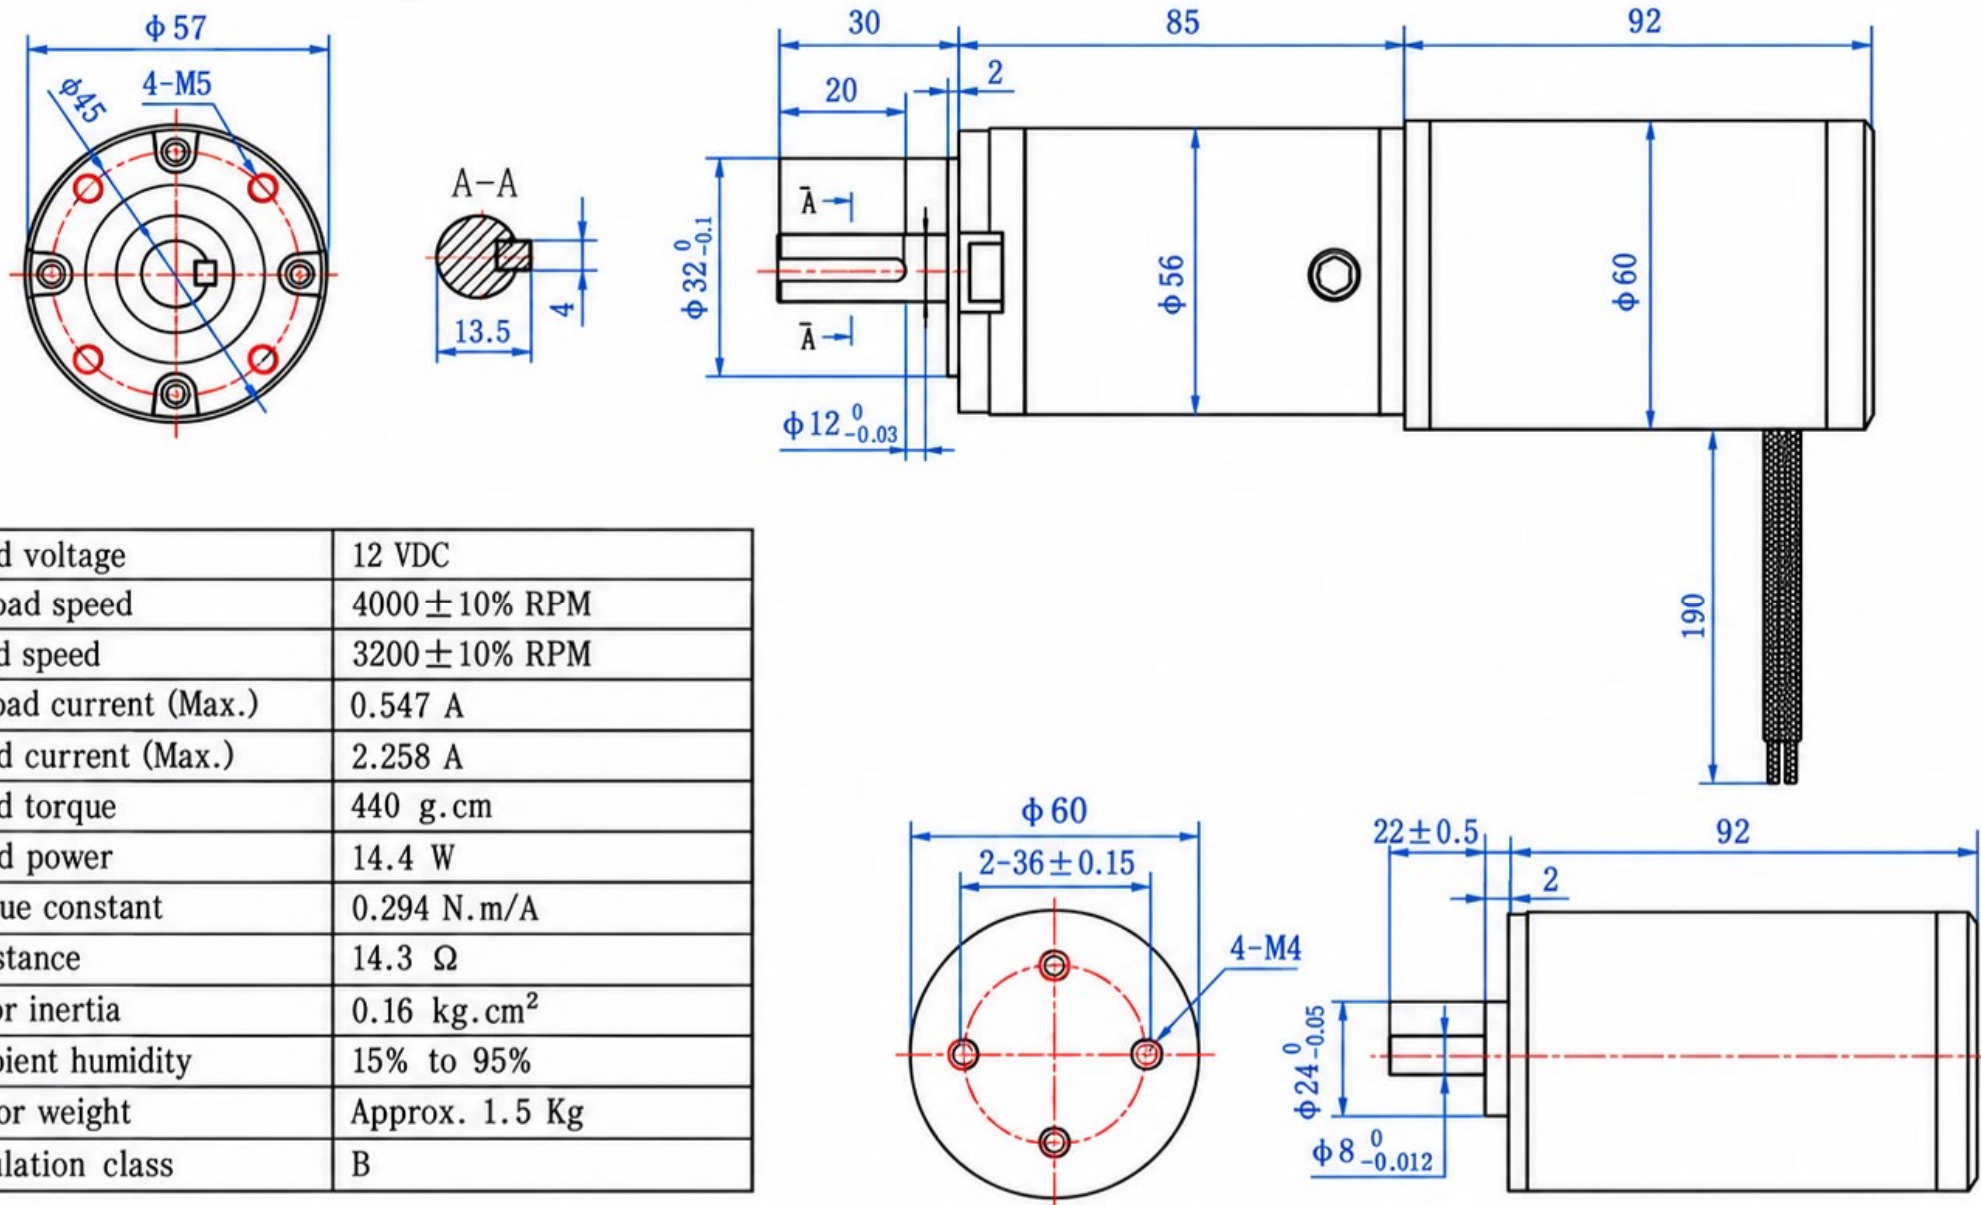

1. Rated voltage	12 VDC
2. No load speed	4000 $\pm$ 10% RPM
3. Rated speed	3200 $\pm$ 10% RPM
4. No load current (Max.)	0.547 A
5. Rated current (Max.)	2.258 A
6. Rated torque	440 g.cm
7. Rated power	14.4 W
8. Torque constant	0.294 N.m/A
9. Resistance	14.3 Ω
10. Rotor inertia	0.16 kg.cm ²
11. Ambient humidity	15% to 95%
12. Motor weight	Approx. 1.5 Kg
13. Insulation class	B

Design

Unit

mm

OUKEDA®

DRAWING

OK60ZLYS92-12A-PG168

Technology