


TEC4266

42mm brushless motor

| | |
|---|------------------------|
| Connection Mode B | |
| Clockwise Rotation/Counter Clockwise Rotation | |
| FG Signal | |
| PWM Control | |
| Locked Rotor Protection | |
| Power | 35W (Internal Drive) |
| | 50W (Extnal Drive) |
| Life Expectancy | ~ 5000H (Ball Bearing) |
| | / |


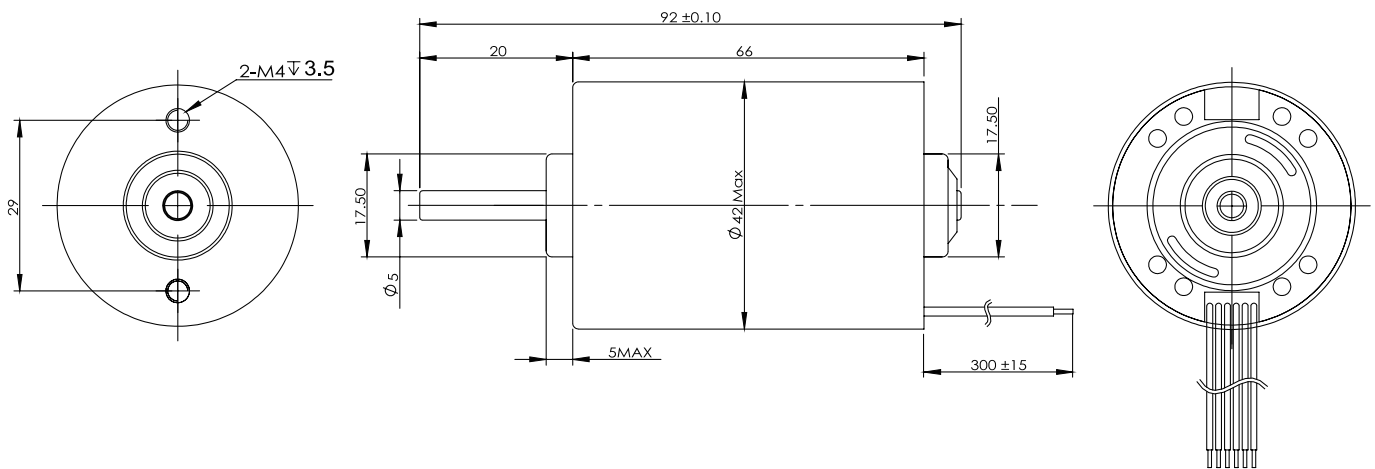


Weight:350g(Approx)

Unit(mm)

Motor Technical Data

| Motor model | Rated voltage | No-load | | Rated | | | | Stall | |
|-------------|---------------|---------|---------|-------|--------|---------|-------|--------|---------|
| | | Speed | Current | Speed | Torque | Current | Power | Torque | Current |
| | | r/min | mA | r/min | g.cm | mA | W | g.cm | A |
| TEC4266 | 12.0 | 5000 | 180 | 4500 | 500 | 3200 | 24 | 2000 | 5 |
| TEC4266 | 24.0 | 5000 | 325 | 4400 | 500 | 1500 | 21 | 2500 | 5 |

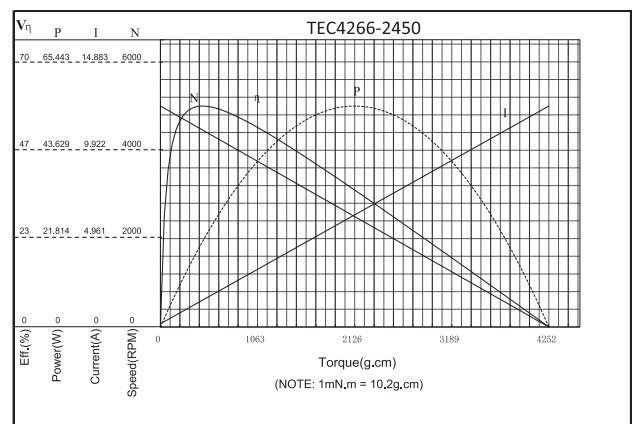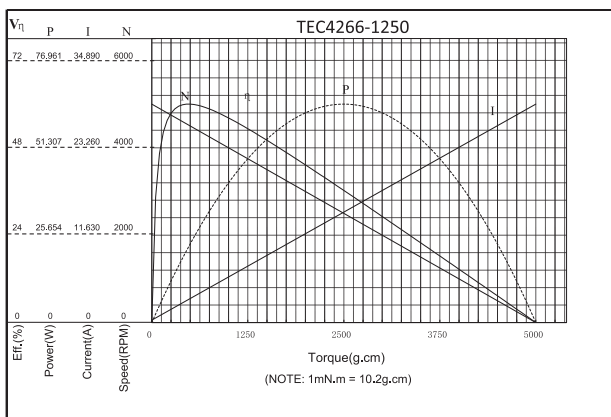

NOTE: the left side of red line area can continuous work